



CEDAR DECOR PVT. LTD.

A-1 / 1001, 10th Floor Palladium Rd, Makarba, Ahmedabad - 380015, Gujarat. Ph.: +91 (79) 2970 5335 / 6 / 7. Fax: +91 (79) 2970 5338











YEARS WARRANTY













GRADE LAMINATE PANEL

U.V RESISTANT

WEATHER PROOF

OF QUALITY ASSURANCE

DURABLE, PRODUCT WITH 10 YEARS







INDIA'S FIRST PVDF LAYERED **EXTERIOR CLADDING**



Discover the versatile





THE DESIGN **POSSIBILITIES ARE ENDLESS**

EXTERIOR LAMINATES

DURIAN Exterior compact Grade

Laminates (ECGL) is a self-supporting HPL (High Pressure Laminates) which has excellent stability to withstand all shortfalls seen in other external application substrates. ECGL is an ideal option as cladding to decorates the exterior of a building

PROPERTIES ECGL:

ECGL is resistant to Ultra violet, Water, Hail, Adverse Weather, Termite and Borer. It meets international EN 438 EG standard of high resistance to abrasion and colour fading in extreme condition. since ECGL is delamination proof, splinter proof and anti-static, it is an ideal production exterior application

BENEFITS OF



















VARIOUS APPLICATIONS:

FACADE CLADDING

- Balcony paneling or cladding.
- External cladding of commercial or residential building.
- Fences, Balcony Railing &
- Compound Wall Railing.
- Entry rate for Bungalows,
- Commercial Buildings, Factories, etc.
- Knock down shop, offices, cabins.
- Outdoor Furniture.
- External Cladding for Shopping malls,
- Multiplex, Schools, stadiums, Theaters, Auditoriums, etc.
- Traffic Kiosks.
- Bus Shelters.



SPECIAL PROPERTIES:

Ageing performance and weather resistance

- Durian ECGL can be exposed to any weather conditions i.e.sunlight, rain and wind.
- Exhaust fumes and acid rain can have mild effect on surface
- Not affected by thermal shock and maintains its physical and mechanical properties
- Chemical Resistant
- Anti Graffiti

Dimensional Stability


- With due conditioning at site, moderate dimensional variation due to the effects of atmosphere; it contract in low humidity and expands in high humidity environments.
- The compactness of Durian ECGL provide excellent mechanical properties such as tensile, compressive and impact strength. The homogeneity and high density of the panel ensure maximum retention of screw









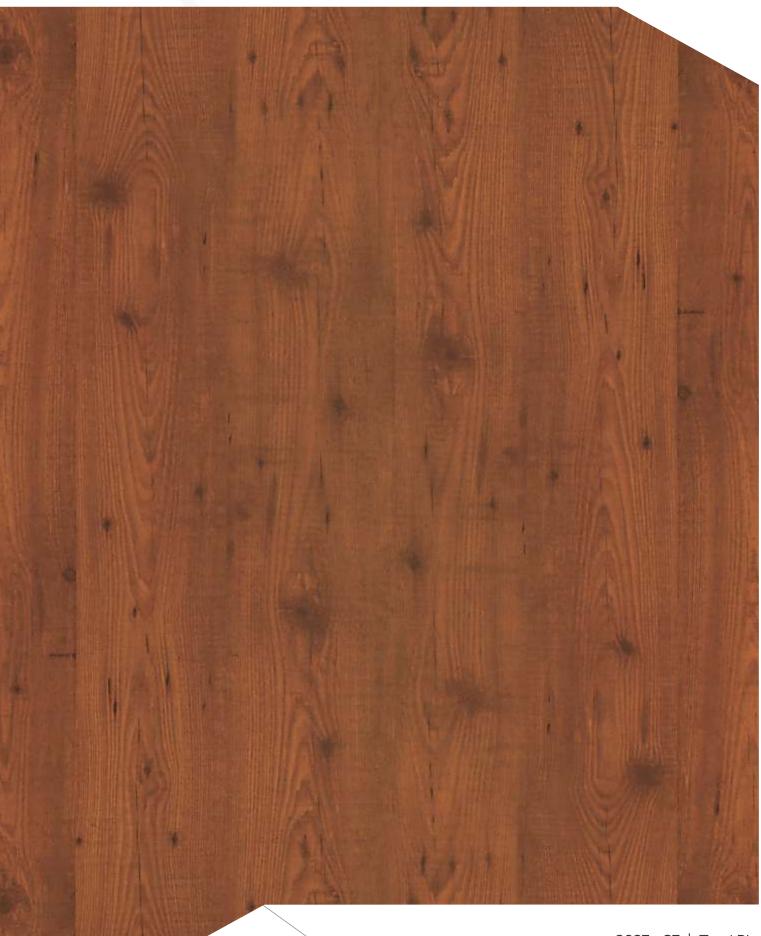

2037 - SF | Tyrol Pine




































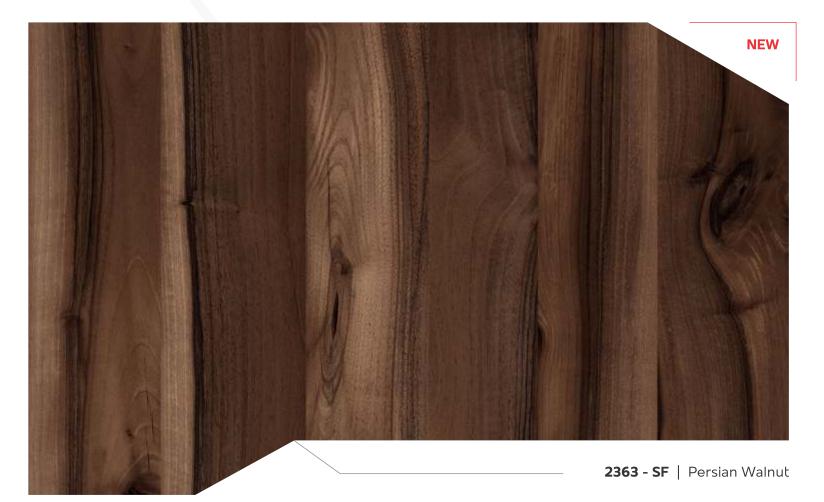














































































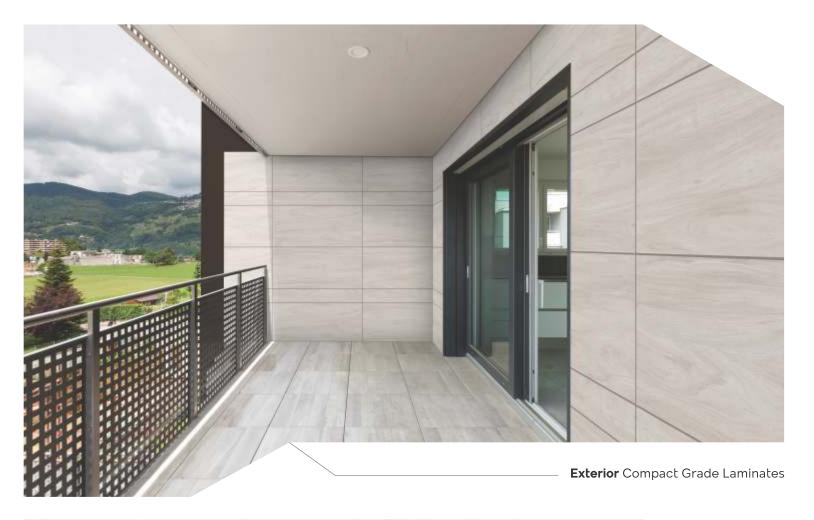


















































1253 - SF | Pewter Grey







Book 7.61 "x9.438 "















